

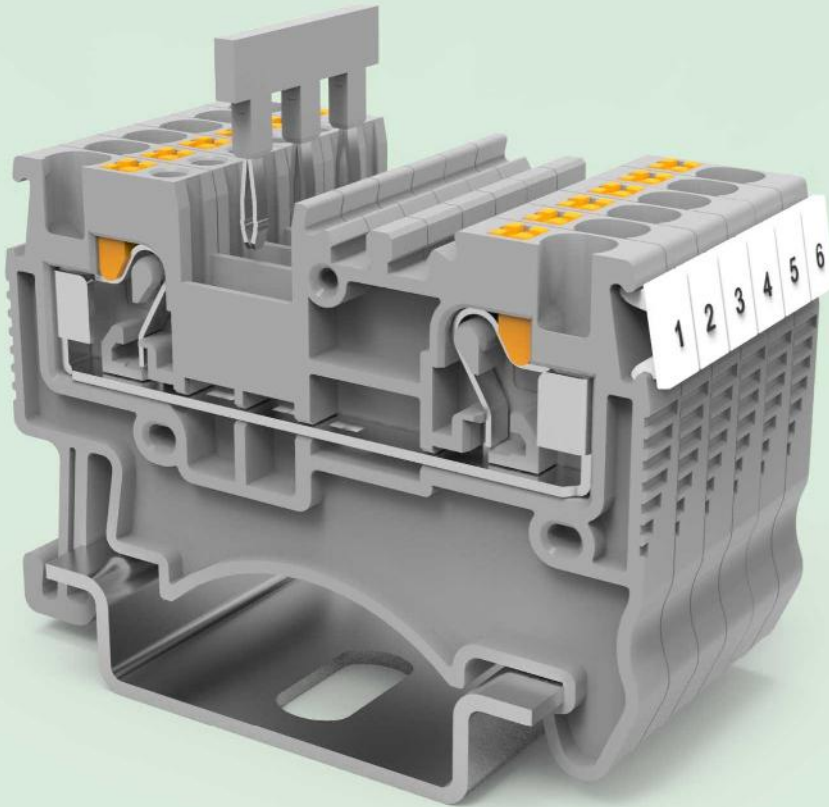


### DS1.5

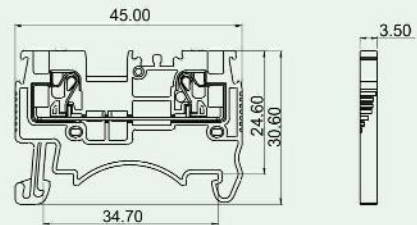

- Push-in 直插式连接技术, 操作更快捷;
- 蝶型弹簧结构, 抗振性能好;
- 插拔式桥接件方便、快捷、高效。
- 最大线径: 1.5mm<sup>2</sup>。
- Push-in connection technology, fast operation;
- Push-in spring structure, excellent vibration resistance;
- Bridge accessory available, convenient, fast and high efficiency.
- Max. wire gage: 1.5mm<sup>2</sup>.



### 技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947datasheet)				UL1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
DS1.5	0.2-1.5mm <sup>2</sup> /26-14 AWG	01P	500		17.5		300		15	

### 应用行业 Application


工业自动化、机械、电梯、电力电气、轨道交通等行业。  
Industrial automation, machinery, elevator, electric power, Railway transportation etc.



### 产品包装方式 Packing

Product model	Pcs./Pkt.
DS1.5	15

### 附件 Accessory



### 型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DS1.5	PT1.5/S	2002-1201

### 产品订货 How to order

