


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		8HS螺丝变更为8H螺丝	LIN	05/13/08
△		VDE额定电流由24A改为32A	Zengy	06/16/08
△		工程变更, 去掉挡线板	Zengy	07/21/08
△		品名中加上塑件底高"1.2"	Zengy	09/03/08
△		修改品名中"10A"为"100A"	LJH	11/06/08
△		修改参数及刻字	LJH	02/12/09
△		结构变更	hyq	06/03/09
△		增加线径刻字	HYQ	08/03/09

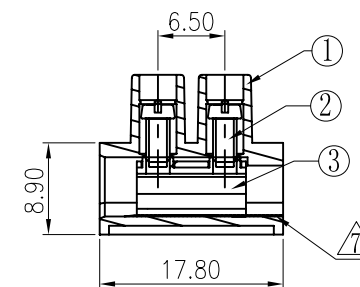

SECTION A-A

Notes:

1. Pitch: 8.2mm, Poles: 2-12P
2. Rated voltage/current: UL 300V/20A △
VDE 450V/32A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 20~12AWG, 0.5-4.0mm² △
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6	over 10	over 30	over 60	over 100	over 150		
to 6	to 10	to 24	to 30	to 60	to 100	to 150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

3	DG8HS-Current carrier	X000002140 (H)	XX	Steel	Cr ³⁺ Zn
2	DG8H"-Screws M2.5	S000001110 (H)	XX*2	Steel	Cr ³⁺ Zn
1	DG8HS-1.2 Housing	2022A0YXXA (H)	1	PA66	UL94V-2
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		DF TO LIN	DATE 08/09/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME: DG8HS-1.2-XXP-1Y-100A (H) △ DRAWING NO. DG8HS-E06 SIZE A4 REV T8 /PART NO. 08/03/09	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
MM		MFD	DATE		
.0 ±		APPL	DATE		
.00 ±		MATERIAL :		G.E :	
.000 ±		FINISH:		SCALE : 1:1	
ANGLES ± 1°		THIRD ANGLE PROJECTION		DD NOT SCALE DRAWING SHEET 1 OF 1	