



Автоматический вык. А-0709J 5а

5701020108

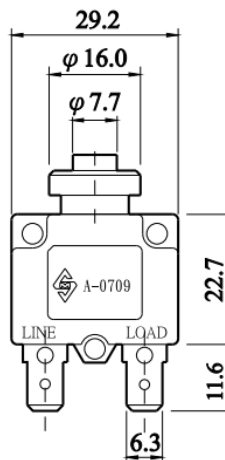


Specification:

1. Rating current: min.5A, max.15A
2. Working pressure: min.12V, max.250V
3. Double usage of DC and AC Application scope: Used at the protection of compound outlet, power transformer and electrical motor.

Technique charecteristic:

Technique characteristic:the test temperature(20° -- 25°),the reference curve as followed:

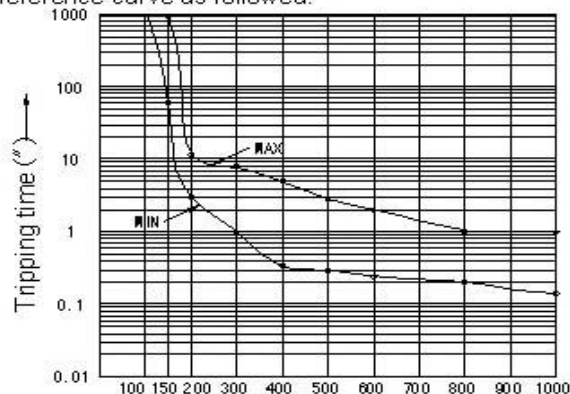

The experiment of short-circuit.ambient temperature: 25°

| Rating current PCT(%) | current overload Rating current PCT | Tripping time |
|-----------------------|-------------------------------------|-------------------|
| | 100% | 1hour no tripping |
| | 150% | 1hour tripping |
| | 200% | 3.0-18" |
| | 300% | 0.8-8" |
| | 400% | 0.35-5" |
| | 500% | 0.3-2.8" |
| | 600% | 0.25-2" |
| | 800% | 0.2-1" |
| | 1000% | 0.15-0.8" |