
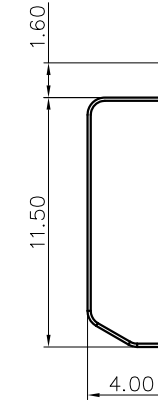
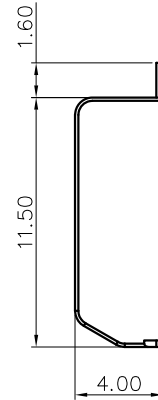
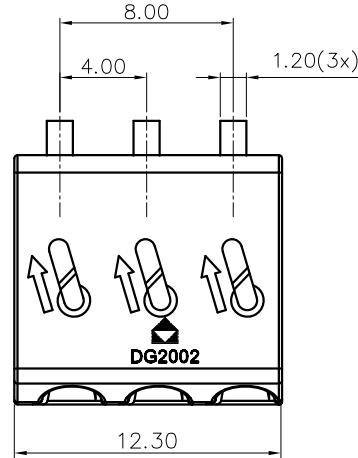
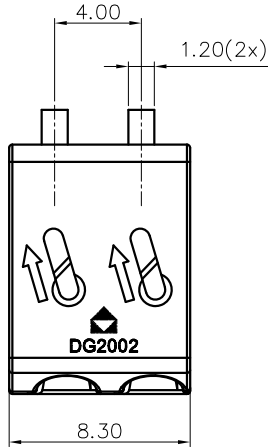





REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



02P/03P


01P



01P

02P

03P

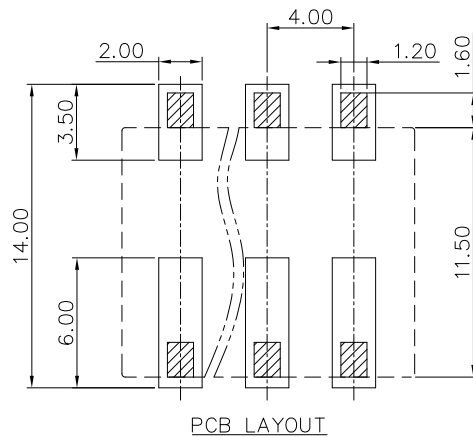

PCB LAYOUT

NOTES1:

UL Standard

- 1. Rated Voltage/Current : 600V/9A(01P)
300V/9A(02P/03P)

- 2. Wire Range : 24~18AWG

IEC Standard

1.

Pollution degree	3	2	2
Overvoltage category	III	III	II
Rate impulse voltage(KV)	4.0KV	4.0KV	4.0KV
Rate voltage(V)	32V	160V	160V
Rate current(A)	9A		


- 2. Wire Range : 0.2~0.75mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 4.00mm, Poles : N=01~03P
- 3. Stripping length : 9mm
- 4. Operating temperature: -40°C~+130°C
- 5. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						-	∩	∇
To	Over	Over	Over	Over	Over	Over	0.1/10			
6	10	10	30	60	100	150				
TO	TO	TO	TO	TO	TO	TO				
6	10	24	30	60	100	150				
±0.15		±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

6. RoHS Compliance

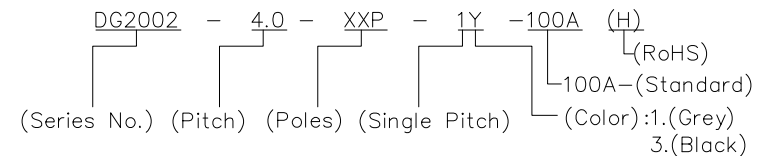

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG2002-4.0-XXP-1Y-100A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING		REV	D0
	DRFT:	DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH) DO NOT SCALE DRAWING	SCALE	1:1	