
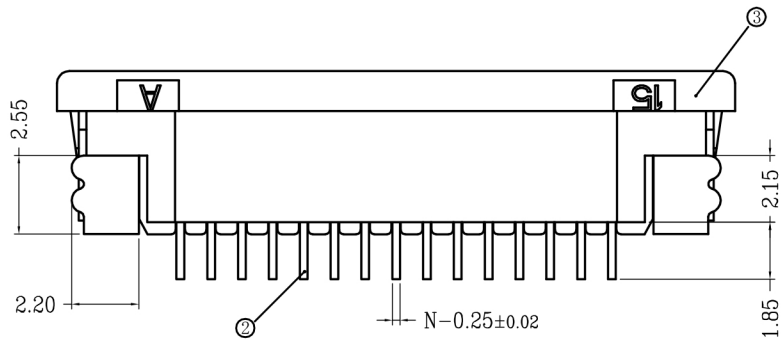
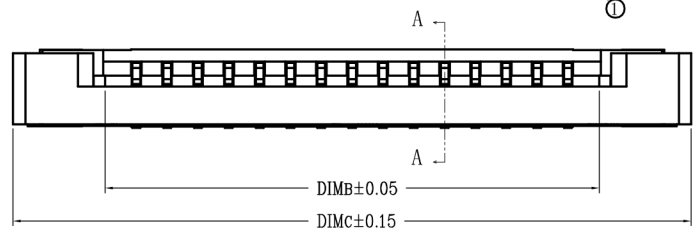
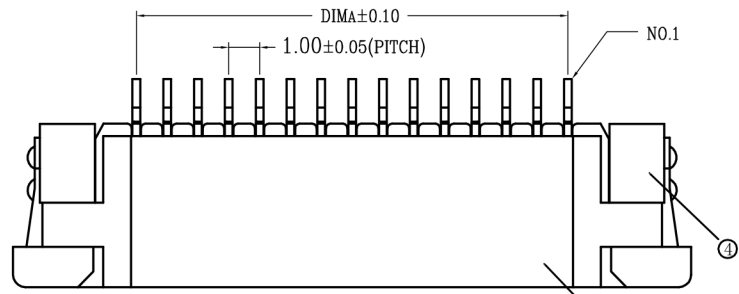
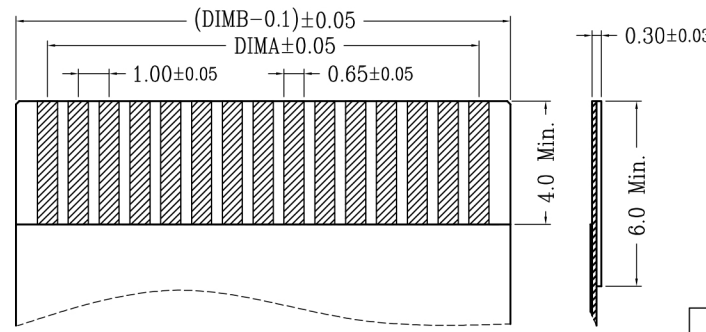


SECTION A-A

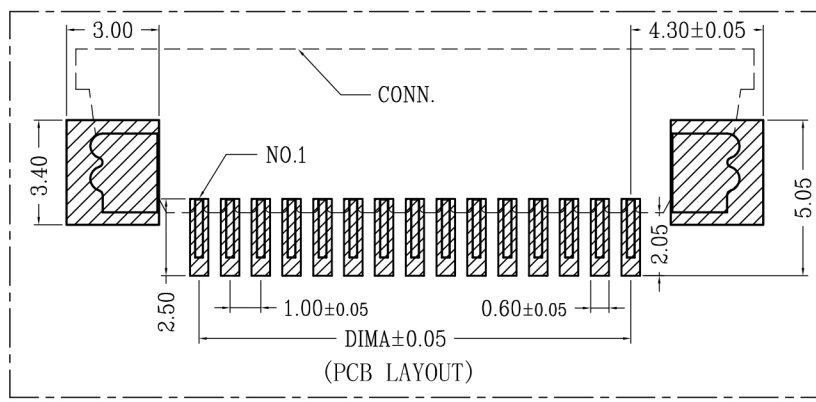

Applicable Flat Cable

①	1.0K Type Housing (H2.5)	LCP UL94V-0 Natural
②	1.0K Type Upper Terminal (H2.5)	Copper Alloy/ Tin Plating
③	1.0K Type Actuator (H2.5)	LCP UL94V-0 Black
④	1.0K Type Fitting Nail (H2.5)	Copper Alloy/ Tin Plating

CKT	DIM A	DIM B	DIM C
4	3.00	5.03	11.10
5	4.00	6.03	12.10
6	5.00	7.03	13.10
7	6.00	8.03	14.10
8	7.00	9.03	15.10
9	8.00	10.03	16.10
10	9.00	11.03	17.10
11	10.00	12.03	18.10
12	11.00	13.03	19.10
13	12.00	14.03	20.10
14	13.00	15.03	21.10
15	14.00	16.03	22.10
16	15.00	17.03	23.10
17	16.00	18.03	24.10
18	17.00	19.03	25.10
19	18.00	20.03	26.10
20	19.00	21.03	27.10
21	20.00	22.03	28.10
22	21.00	23.03	29.10
23	22.00	24.03	30.10
24	23.00	25.03	31.10
25	24.00	26.03	32.10
26	25.00	27.03	33.10
27	26.00	28.03	34.10
28	27.00	29.03	35.10
29	28.00	30.03	36.10
30	29.00	31.03	37.10
31	30.00	32.03	38.10
32	31.00	33.03	39.10
33	32.00	34.03	40.10
34	33.00	35.03	41.10
35	34.00	36.03	42.10
36	35.00	37.03	43.10
37	36.00	38.03	44.10
38	37.00	39.03	45.10
39	38.00	40.03	46.10
40	39.00	41.03	47.10

- Technical Index :
- The surface of the plastic parts should be smooth, no rough (edges, no obvious shrinkage, defects, cracks and other phenomena.)
 - Temperature range : -25° C ~ +85° C.
 - Rated voltage : 50V, AC/DC.
 - Contact resistance : ≤ 0.03 Ω.
 - Insulation resistance : ≥ 500M Ω.
 - Product material No. :

LW10251-**-**-**
NO OF CKT
Plating
0: Terminal all mist tin
1: G/F OVERALL
4: Terminal all bright tin

00 LOGO: WD
0W LOGO
0N LOGO

Packing
T: TUBE
R: TAPE & REEL



TITLE 1.0 Pitch (H=2.5) 1.0 Pitch H2.5 ZIF R/A Type Top CONN.		DR Anlan	
DWG.NO LW10251-****-**		CHKD	
SCALE 1:1		APFD	
UNITS mm		SHEET 1 OF 1	
1		SIZE A4	
1		REV A	