DIP Switch Series

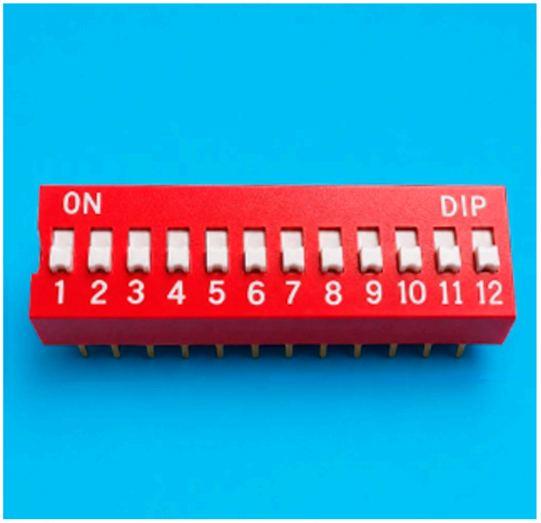

SPECIFICATIONS

Mechanical life: 2000 operations per switch
Operation Force : ≤ 9.8 N max.
Stroke: 2.0 mm
Operation Temp:-20°C ...+70°C
Electrical life: 2000 operations per switch -24 VDC, 25 mA
Contact Resistance: 5 Om max. at initial
Non-Switching Rating: 100 mA, 50 VDC
Switching Rating: 25 mA, 24 VDC
Circuit: Single pole single throw

Soldering and Cleaning Processes
Keep all switch contacts in their "OFF" position for all operations

Model No.	No. Pos.	A
DS-01	1	4.10
DS-02	2	6.64
DS-03	3	9.18
DS-04	4	11.72
DS-05	5	14.26
DS-06	6	16.80
DS-07	7	19.34
DS-08	8	21.88
DS-09	9	24.42
DS-10	10	26.96
DS-12	12	32.04

DS Type

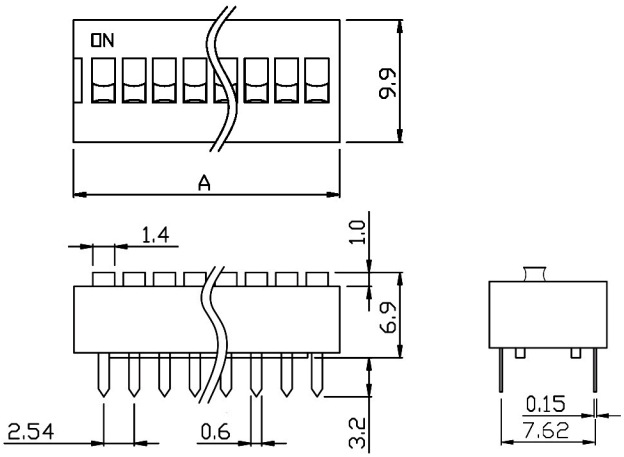



PCB LAYOUT



ORDER INFORMATION

DS - XX

DS : Bulge Type Dip Switch

Number of Pos.: 01~12 Pos.