


ENGINEERING LABORATORY SPECIFICATION		ITEM NO	GST101533
		(DATE)	2016/8/15
NO	Item	Specifications	Conditions
1	Part Number	Динамик 10x15мм 8 Ом 1W	
2	Type	MYLAR	
3	Dimension	1015×H3. 3mm	
4	Voice Coil Imp	8± 15% Ohm	AT 1000 Hz 1.0 V
5	Input Power	Normal Input 0.8W	Maximum Input 1.0W
6	Resonance FO	1700± 20% Hz	Input 1V without A baffle
7	Output SPL	88± 3 dB	AT 1.0W ON AXIS CALIBRATION ROM 0.1M MEASVRMENT CRY6125Y LABORATORY FREE FIELD AVERAGE
8	Response	SPL-10dB FO ~20 K Hz MAX	1600,2000,2500,3000 Hz
9	Polarity	When a positive D.C.current is applied to the voice coil terminal marked to The diaphragm shall move for ward	
10	Operation Test	Must be normal at program Source	0.8W
11	Buzz Rattle Etc	Must be normal at Sine Wave	1.5V
12	Load Test	After test meet item White noise	1.0W 96 Hours
13	Distortion	7% MAX	AT 1000 Hz 1.0W
14	(High Temperature Test)	After 55±3℃	96Hour
15	(Low Temperature Test)	After -25±3℃	96Hour
16	(Humidity Test)	After 40±3℃ 90~95% R.H.	96Hour
			RUI CHI

SIZE DRAW

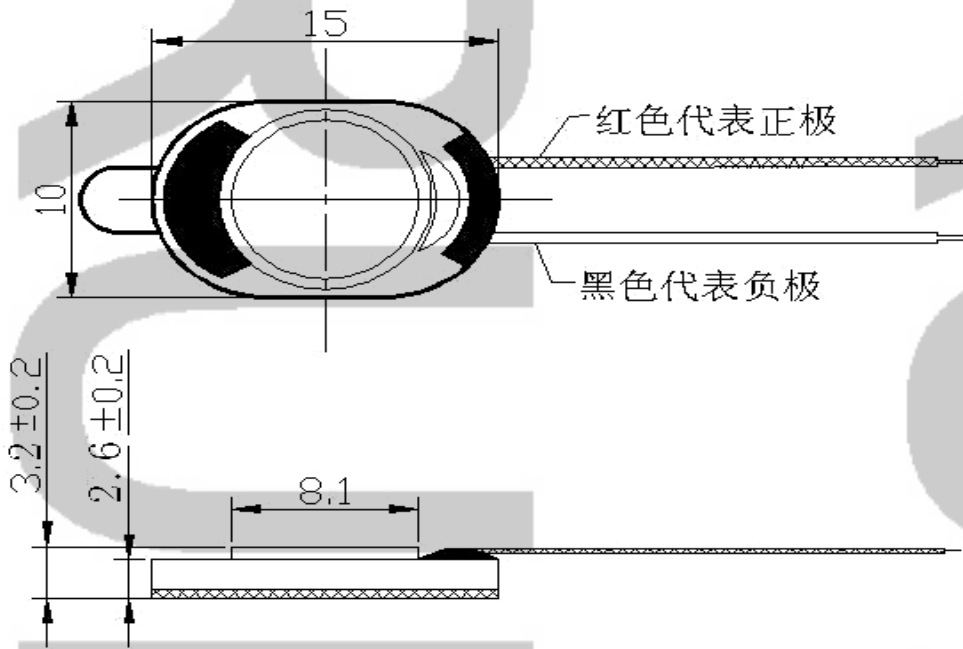


05/30/2007 14:39

CRY6125Y 扬声器测试仪 V91

无框 滤波器1次

DCR= ___ Ω 1KHz灵敏度 : 078.61 dB ACZ: ___ Ω Qm: ___
 Ueq= ___ dm3 → 平均灵敏度 : 093.77 dB Zm : ___ Ω Qe: ___
 Dist.=010 cm F1= 1295Hz F2=29006Hz F0 : ___ Hz Qt: ___
 型号:1510m-0308
 0 dB 参考值为 : 20.0 μPa 扫频速度 : 002 ms 中速 扫频模式 : 1/24 Oct

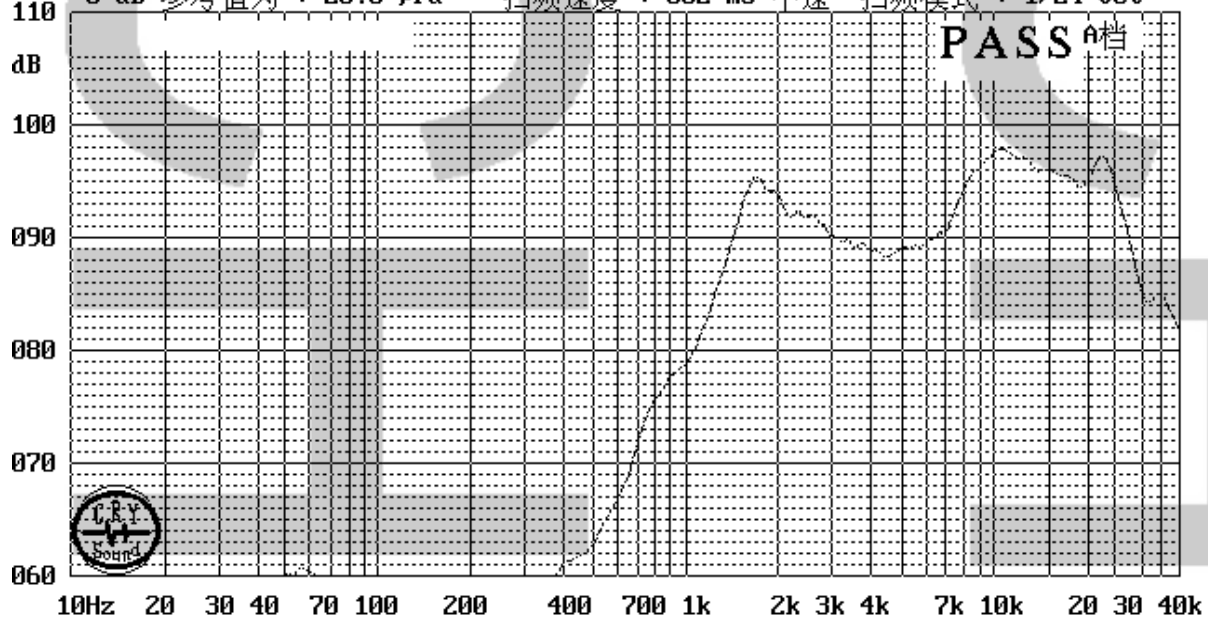

RUICHI