


ORDERING CODE



- NIL....STANDARD
- LLED
- TTEST BUTTON
- ALED + TEST BUTTON
- TERMINAL TYPE
- NIL....PLUG IN P....PBC
- CONFIGURATION
- NOMINAL VOLTAGE
- DC5V,DC6V,DC9V,DC12V,DC24VDC48V,DC110V
- AC6V,AC9V,AC12V,AC24V,AC48V,AC120V,AC240V
- TYPE

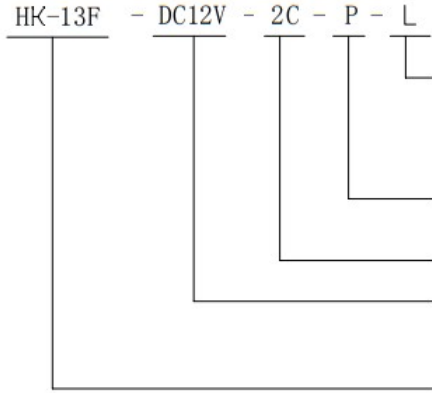

CONTACT DATA

Contact Form	2C
Contact Material	Ag Alloy
Contact Ratings	10A 240VAC/30VDC
Max Switching Voltage	250VAC/30VDC
Max Switching Current	10A
Max Switching Power	2500VA/300W
Initial Contact Resistance	100mΩ Max at 6VDC 1A
Life Expectancy Electrical	100,000 Operations (rated load)
Life Expectancy Mechanical	10,000,000 Operations (no load)


GENERAL DATA

Insulation Resistance	100MΩ min at500VDC	
Dielectric Strength Between Open Contacts	1000VAC 50-60HZ (1minute)	
Dielectric Strength Between Contacts And Coil	1500VAC 50-60HZ (1 minute)	
Operate Time	25ms max	
Release Time	25ms max	
Ambient Temperature	-40°Cto+70°C	
Shock Resistance	Malfunction	20G
	Destruction	100G
Vibration Resistance	10-55Hz,1.5mm double amplitude	
Ambient humidity	40-85% RH	
Weight	Approx32g	
Safety Standard	CQC	


COIL DATA (@20°C)

Rated Voltage (V)	DC Coil 0.9W			AC Coil 1.2VA		
	Coil Resistance Ω (±10%)	Max OperateVoltage (VDC)	Min Release Voltage (VDC)	Coil Resistance Ω (±10%)	Max OperateVoltage (VDC)	Min ReleaseVoltage (VDC)
5	32	3.75	0.5	-	-	-
6	40	4.5	0.6	11.5	4.8	1.8
9	90	6.75	0.9	40	7.2	2.7
12	160	9	1.2	46	9.6	3.6
24	650	18	2.4	184	19.2	7.2
48	2600	36	4.8	735	38.4	14.4
110	11000	82.5	11	-	-	-
120	-	-	-	4550	96	36
240	-	-	-	14400	192	72

Outline Dimension(mm)

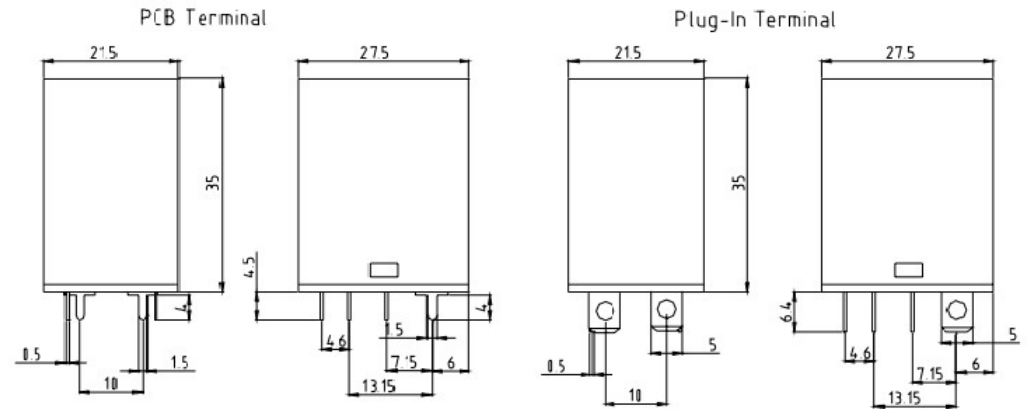


Wiring Diagram



(Bottom View)

PC Board layout



(Bottom View)