

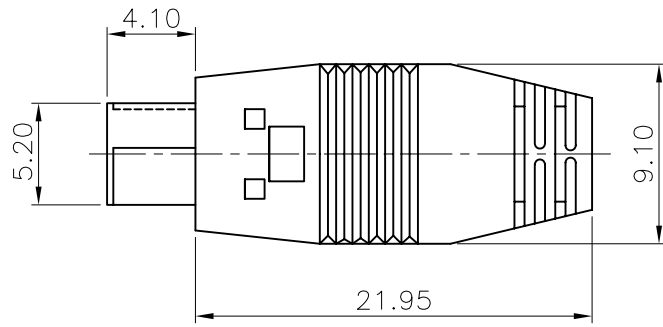
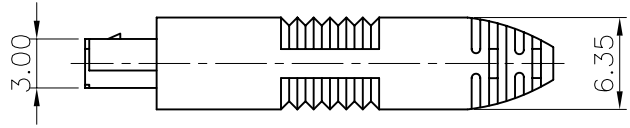


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

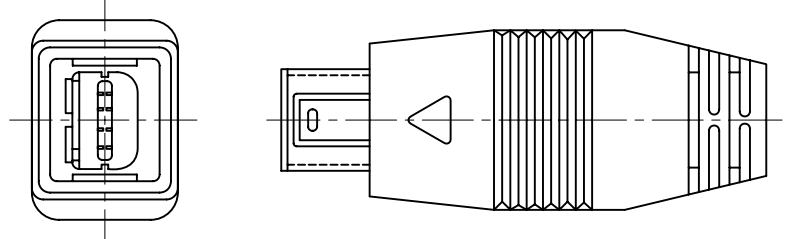

NOTES:

- SPECIFICATIONS
 - .CURRENT RATING: 0.5A/pin Max.
 - .VOLTAGE RATING: 30V(DC)
 - .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
 - .CONTACT RESISTANCE: 50mΩ Max.
 - .INSULATION RESISTANCE: 100MΩ Min
 - .TEMPERATURE RANGE: -20°C+70°C

- MATERIALS
 - .HOUSING: PBT.
 - .HOOD: ABS.
 - .SHELL: STEEL
 - .CONTACT: COPPER ALLOY

3.PRODUCT NUMBER CODE:

DS1105 - X X X X

- Contact plating
- 0: Selective gold flash
- C: Selective 3u" gold
- Shell plating
- 6: Tin
- N: Nickel
- 8: Full gold
- Color of Hood
- B: BLACK
- Color of housing
- B: BLACK
- Products series
- DS1105

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI USB 4PIN A TYPE MALE SOLDER	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1105	
.XX	±0.25	.XX	±2°	USBAMini-SP 4		1105		
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1105-XXX						