<u>ElecSuper</u>

### SuperESD - TPD4E1U06DCKR

#### 1. Description

The TPD4E1U06DCKR is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

#### 2. Features

- IEC 61000-4-2 Level 4 ESD Protection
  - ±12kV Contact Discharge
  - ±17kV Air Discharge
- 60W Peak pulse Power (8/20us)
- Low clamping voltage

- Working voltage: 5V
- Low leakage current
- RoHS compliant
- Protecting 4 unidirectional lines
- Capacitance: 0.8pF Typ.

### 3. Applications

- Cellular Handsets and Accessories
- Cordless Phones
- Personal Digital Assistants (PDA's)
- Notebooks & Handhelds
- Digital Cameras
- Portable Instrumentation

### 4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
TPD4E1U06DCKR	SOT-363	.B54	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	7 inches

Table-1 Ordering information



# 5. Pin Configuration and Functions

Pin	Name	Description	Outline	Circuit Diagram		
1	IO1	Connect to I/O				
2	GND	Connect to GND	6 5 4	<b>•</b> 5		
3	IO2	Connect to I/O	DE 4	•6 •1 ★ 3• 4•		
4	IO3	Connect to I/O	B54			
5	Vcc	Connect to Vcc	<sub>1</sub> □ <sub>2</sub> □ <sub>3</sub> □	•2		
6	IO5	Connect to I/O				

Table-2 Pin configuration

# 6. Specification

# 6.1. Absolute Maximum rating

Over operating free-air temperature range (unless otherwise noted)

Parameters	Symbol	Min.	Max.	Unit
Peak pulse power (tp=8/20us)@25°C	$P_{pk}$	-	60	W
Peak pulse current (tp=8/20us)@25°C	I <sub>PP</sub>		4	А
ESD (IEC61000-4-2 air discharge) @25°C	$V_{ESD}$	-	±17	kV
ESD (IEC61000-4-2 contact discharge) @25°C	$V_{ESD}$	-	±12	kV
Junction temperature	TJ	-	150	°C
Operating temperature	T <sub>OP</sub>	-40	125	°C
Storage temperature	T <sub>STG</sub>	-55	150	°C
Lead temperature	TL	-	260	°C

Table-3 Absolute Maximum rating




## 6.2. Electrical Characteristics

At TA = 25°C unless otherwise noted

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Stand-off Voltage	V <sub>RWM</sub>				5	V
Reverse Breakdown Voltage	$V_{BR}$	IT=1mA	6			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =5V			1	uA
Clamping Voltage	Vc	I <sub>PP</sub> =1A; tp=8/20us		10		V
Clamping Voltage	Vc	I <sub>PP</sub> =4A; tp=8/20us		15		V
		I/O to GND; VR=0V; f=1MHz		0.8		pF
Junction Capacitance	С	Between I/O; VR=0V; f=1MHz		0.4		pF


Table-4 Electrical Characteristics

Symbol	Parameters
$V_{RWM}$	Peak Reverse Working Voltage
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>
$V_{BR}$	Breakdown Voltage @ I⊤
I <sub>T</sub>	Test Current
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
Vc	Clamping Voltage @ I <sub>PP</sub>
I <sub>F</sub>	Forward Current
V <sub>F</sub> Forward Voltage @ I <sub>F</sub>	






# 7. Typical Characteristic

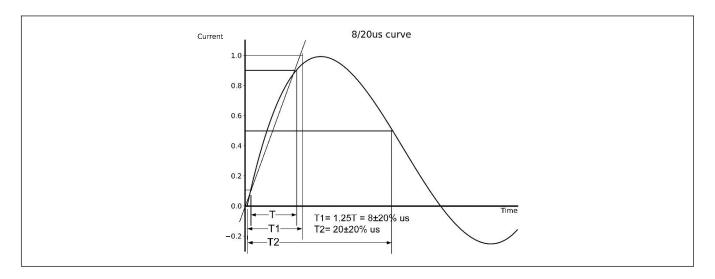


# 8. Typical Application

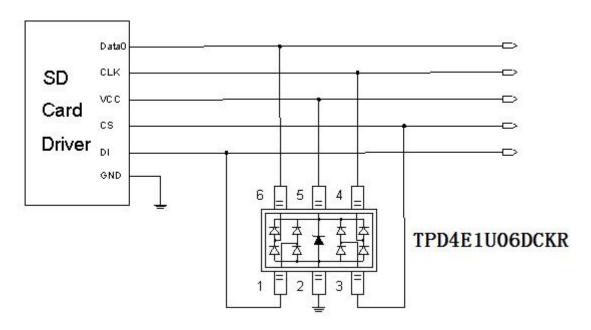



Typical Interface Application



## 9. Dimension

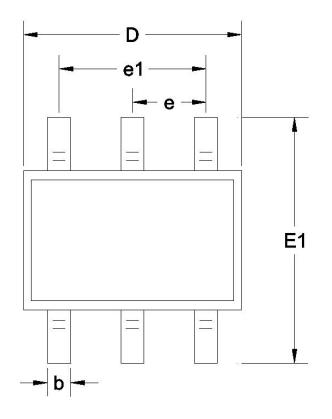

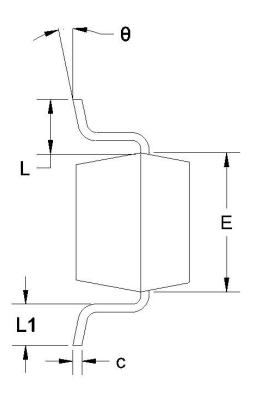

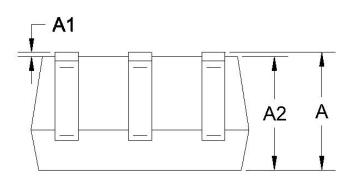



**SOT-363** 


Unit: mm

Sy	mbol	Α	A1	A2	b	С	D	θ
Snoc	Min	0.900	0.000	0.900	0.150	0.080	2.000	0°
Spec	Max	1.100	0.100	1.000	0.350	0.150	2.200	8°
Sy	mbol	Е	E1	е	e1	L	L1	-
Span	Min	1.150	2.150	0.650	1.200	0.525	0.2600	-
Spec	Max	1.350	2.450	REF	1.400	REF	0.4600	-

Table-5 Product dimensions in millimeter



### 10. Recommended Land Pattern



#### Note:

- 1. Controlling dimension: in millimeters
- 2. General tolerance: ±0.05mm
- 3. The pad layout is for reference only

www.elecsuper.com

#### **DISCLAIMER**

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for (1) selecting the appropriate ElecSuper products for your application;

- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.